



## KF Arched 65/35 CH



### APPLICATION

**BUNDREX® KF 65/35 CA** is cold-drawn collated monofilament steel fiber with optimal anchorage.


It provides best solution for

- Sprayed concrete
- Precast

### PACKAGING




20 kg paper bag



1,000 kg PP bag

### GEOMETRY

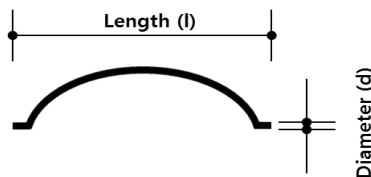

#### Dimensions & Appearance

- Length (l) 35.0 mm
- Diameter (d) 0.55 mm
- Aspect Ratio (l/d) 65

#### Material Properties

- Tensile strength 1,100 MPa


#### Stuffing (Standard Export Packing)

- 20kg paper bag x 50 units or 1,000kg PP bag on a pallet
- 20 Pallets in a 20 ft dry container in two layers

### STORAGE



Keep Dry



Do Not Stack  
in three layers

### CERTIFICATES



### FOR MORE INFORMATION

- [www.kosteel.co.kr](http://www.kosteel.co.kr)
- [www.steelfiber.co.kr](http://www.steelfiber.co.kr)
- Telephone: Int+ 82. (0)2. 2106. 0135
- Facsimile: Int+ 82. (0)2. 2106. 0240
- E-mail: [steelfiber@kosteel.co.kr](mailto:steelfiber@kosteel.co.kr)