



KF 50/50 LH



APPLICATION

BUNDREX® KF 50/50 LH is cold-drawn loose steel fiber with hooked ends for optimal anchorage.

It provides best solution for

- Slab On Grade
- Precast
- Shotcrete

PACKAGING




20 kg paper bag



1,000 kg HDPP bag

GEOMETRY

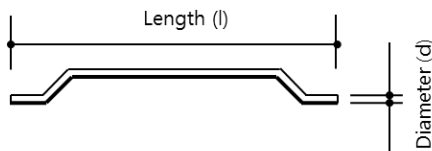

Dimensions & Appearance

- Length (l) 50.0 mm
- Diameter (d) 1.00 mm
- Aspect Ratio (l/d) 50

Material Properties

- Tensile strength 1,100 MPa


Stuffing (Standard Export Packing)

- 20 kg paper bag x 50 units or 1,000kg HDPP bag on a pallet
- 20 Pallets in a 20 ft dry container
- Customized packaging available upon customer's request

STORAGE



Keep Dry



Do Not Stack

CERTIFICATES



FOR MORE INFORMATION

- www.kosteel.co.kr
- www.bundrex.com
- Telephone: Int+ 82. (0)2. 2106. 0119
- Facsimile: Int+ 82. (0)2. 2055. 3298
- E-mail: shkim@kosteel.co.kr